

RFM PANEL

Raised Floor Panels

INTEGRATED WIRELESS ENVIRONMENTAL MONITORING RAISED FLOOR PANEL

01

APPLICATIONS: Raised floor monitoring (RFM) panels combine patented WiNG wireless monitoring technology with Triad's high quality raised floor panels. Ideal for differential pressure and airflow monitoring and compatible with RLE's complete suite of WiNG sensors, RFM panels keep reliable, quality monitoring tucked safely within your raised floor panels.

- Build in levelers allow you to adjust each corner of the panel independently, so you ensure your floor is level.
- Available in both Imperial and Metric Sizes
- Available in a Grey Flek or Crystal White powder coat finish

02

KEY FEATURES:

- Understand static pressure loss or fluctuation
- Increase available datapoints to better understand the needs of each facility.
- Balance cooling airflow

03

WHAT SETS RLE'S RFM PANEL APART?

- **Patent pending**, this innovative panel is the only one of its kind on the market.
- **Quickly increase your data points -** Drop in a panel and immediately gain transparency within your environment. You can't manage what you don't monitor!
- **Flexible monitoring options -** The RFM's custom bracket securely houses any RLE WiNG sensor. Our robust selection of WiNG sensors allows you to monitor a wide range of environmental parameters including airflow, differential pressure, temperature, and leaks.
- **Balance your cooling airflow -** Focused monitoring helps you improve efficiencies and reduce expenses.

<https://parametersystems.com>

970-232-3946

Sales@rletech.com

V02.20

04 WING WIRELESS MONITORING SECURED IN A FLOOR PANEL: RLE's patented WiNG wireless monitoring, coupled with a durable, high quality steel floor panel, provide a one-of-a-kind raised flooring and monitoring solution.




05 RFM PANEL: Compatible with most new and existing raised floor systems

Product Codes	
RFM-CWT	Hollow steel floor panel with integrated bracket to support integration of WiNG wireless monitoring sensor; Imperial sized (24" x 24"); 1250 lb load rating; Crystal white powder coat
RFM-GFT	Hollow steel floor panel with integrated bracket to support integration of WiNG wireless monitoring sensor; Imperial sized (24" x 24"); 1250 lb load rating; Grey flek powder coat
RFM-HPL	Hollow steel floor panel with integrated bracket to support integration of WiNG wireless monitoring sensor; Imperial sized (24" x 24"); 1250 lb load rating; Gray starlight laminate topsheet
WiNG-T	WiNG temperature sensor; Available with 900MHz or 868MHz wireless transmitter
WiNG-TH	WiNG temperature and humidity sensor; Available with 900MHz or 868MHz wireless transmitter
WiNG-DAP	WiNG temperature and humidity sensor; Available with 900MHz or 868MHz wireless transmitter
WiNG-AIR3	WiNG air velocity sensor; Range: 0-3 meters per second, +/-10%; Includes 6' sensor connector cable; Available with 900MHz or 868MHz wireless transmitter
WiNG-AIR4	WiNG air velocity sensor; Range: 0-4 meters per second, +/-5%; Includes 6' sensor connector cable; Available with 900MHz or 868MHz wireless transmitter
WiNG-AIR10	WiNG air velocity sensor; Range: 0-10 meters per second, +/-5%; Includes 6' sensor connector cable; Available with 900MHz or 868MHz wireless transmitter
WiNG-RTD	WiNG temperature probe input; Accepts one 2-wire 1000 ohm platinum (pt1000) probe; Available with 900MHz or 868MHz wireless transmitter

05

Product Codes

WiNG-THRM	WiNG two wire thermistor input; Accepts one wired 10K-2 thermistor input; Available with 900MHz or 868MHz wireless transmitter
WiNG-DI	WiNG digital input; Accepts one wired digital NO/NC input; Available with 900MHz or 868MHz wireless transmitter
WiNG-LD	WiNG leak detector; Accepts leak detection sensing cables, chemical sensing cables, or a spot detector; Available with 900MHz or 868MHz wireless transmitter
WiNG-DAP	WiNG differential pressure sensor; Includes 3' of flexible polyurethane tubing; Range: -500 to 500 Pa (-2 to +2 in H ₂ O), +/- 2% of span ; Available with 900MHz or 868MHz wireless transmitter
WIFI-TH	Temperature/humidity sensor; Wi-Fi wireless transmitter; requires USB-A to Micro B cable for configuration
LD310	Single zone leak detection controller with audible alarm. Requires PSWA-DC-5 or WA-DC-5-ST.

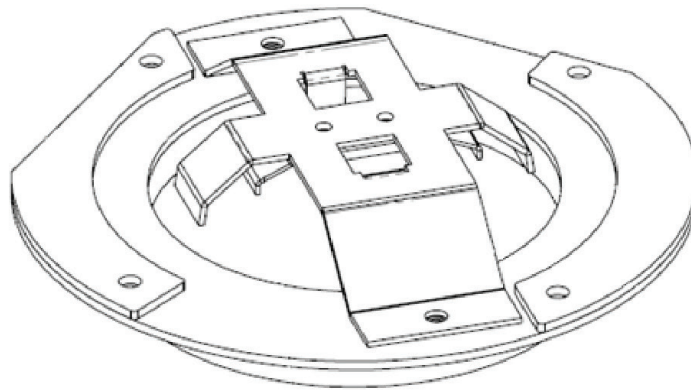

Our custom bracket securely houses any WiNG sensor within a RFM panel.

06

Technical Specifications

Composition	Steel
Compatibility	Compatible with most new and existing raised floor systems
Powder Coat Colors	Grey flek or crystal white. Gray starlight laminate topsheet available.
Imperial Size	Dimensions and Weight: 24" x 24" (610mm x 610mm); 17 lbs. (7.7 kg)
Static Load Rating	1,250 lbs.
Country of Origin	United States of America

06

Technical Specifications

Style	Solid Heavy Duty Panel
Included Features	Dual Handles Horizontal & vertical levelers
Composition	Steel
Finish	Powder Coat Colors: Grey flek or crystal white. Other colors available for a set-up charge.
Compatibility	Compatible with all new and existing raised floor systems
Imperial Size	Dimensions: 24" x 24" (610mm x 610mm); 37 lbs. (16.8 kg) Load Rating Available in 4,000 lb or 5,000 lb
Metric Size	Dimensions: 600mm x 600mm; 37 lbs. (16.8 kg) Load Rating Available in 4,000 lb or 5,000 lb
Country of Origin	United States of America